

ECO 24

RIM STRAIGHTENING MACHINE

FALCON



CE

ECO 24

RIM STRAIGHTENING MACHINE

Eco24 Wheel Rim Straightening Press has been designed for the repairing 10" to 24" dimensioned rims.

The ergonomic design of the machine gives operation easiness for using by the service operators.

Make use of the small size piston to fix the inner and the outer sides of the damaged rims.


The mobile hydraulic piston can correct all the bended points on rims. The damaged rims can be fixed easily by Eco24 while a short operation which takes just a couple of minutes.



Bead straightening lever



Tools

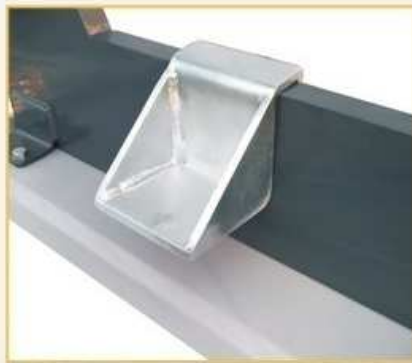

Vertical piston bed



The mobile piston

Standard Accesories

- 12 pcs rim centering rings
- 7 pcs straightening tips
- 3 pcs extended tip holders
- 1 pcs lever
- 1 pcs upper support
- 1 pcs lower support
- 5 pcs support pins
- 5 pcs flange nuts and bolts
- 1 pcs gauge

Optionals

- 220 V. Monophase

Tecnical Data

- Rim Diameter: 10"- 24"
- Hydraulic Motor: 0,75 Hp
- 380V. 50 Hz. 3 Phase
- Working Pressure: 140 bar
- Sound Level: 75 dBA

Dimensions

- Height: 1614 mm.
- Length: 1235 mm.
- Width : 430 mm.
- Packing Dimentions: 850x700x1600H mm.
(Wooden palette in box)

Weight

- Net: 165 kg.
- Gross: 175 kg. (Wooden palette in box)