

**PRO 28LS**  
RIM STRAIGHTENING MACHINE

**FALCON**



**CE**

# PRO 28LS

## RIM STRAIGHTENING MACHINE

Pro 28LS  
Wheel Rim Straightening Machine & Lathe  
Equipment has been designed for the repairing  
10" to 28" dimensioned larger rims.

The ergonomic design of the machine  
gives operation easiness for using by the  
service operators.

Make use of the small size piston to fix the  
inner and the outer sides of the damaged  
rims.

The mobile hydraulic piston can correct all  
the bended points on rims. The damaged  
rims can be fixed, easily by Pro 28LS  
while a short operation which takes just a  
couple of minutes.



The mobile piston



Vertical piston bed




# PRO 28LS

RIM STRAIGHTENING MACHINE



Lathe equipment, easily lathes the damaged edges on rims after straightening operation

We supply the electrical panel 24 V for a secure operation.

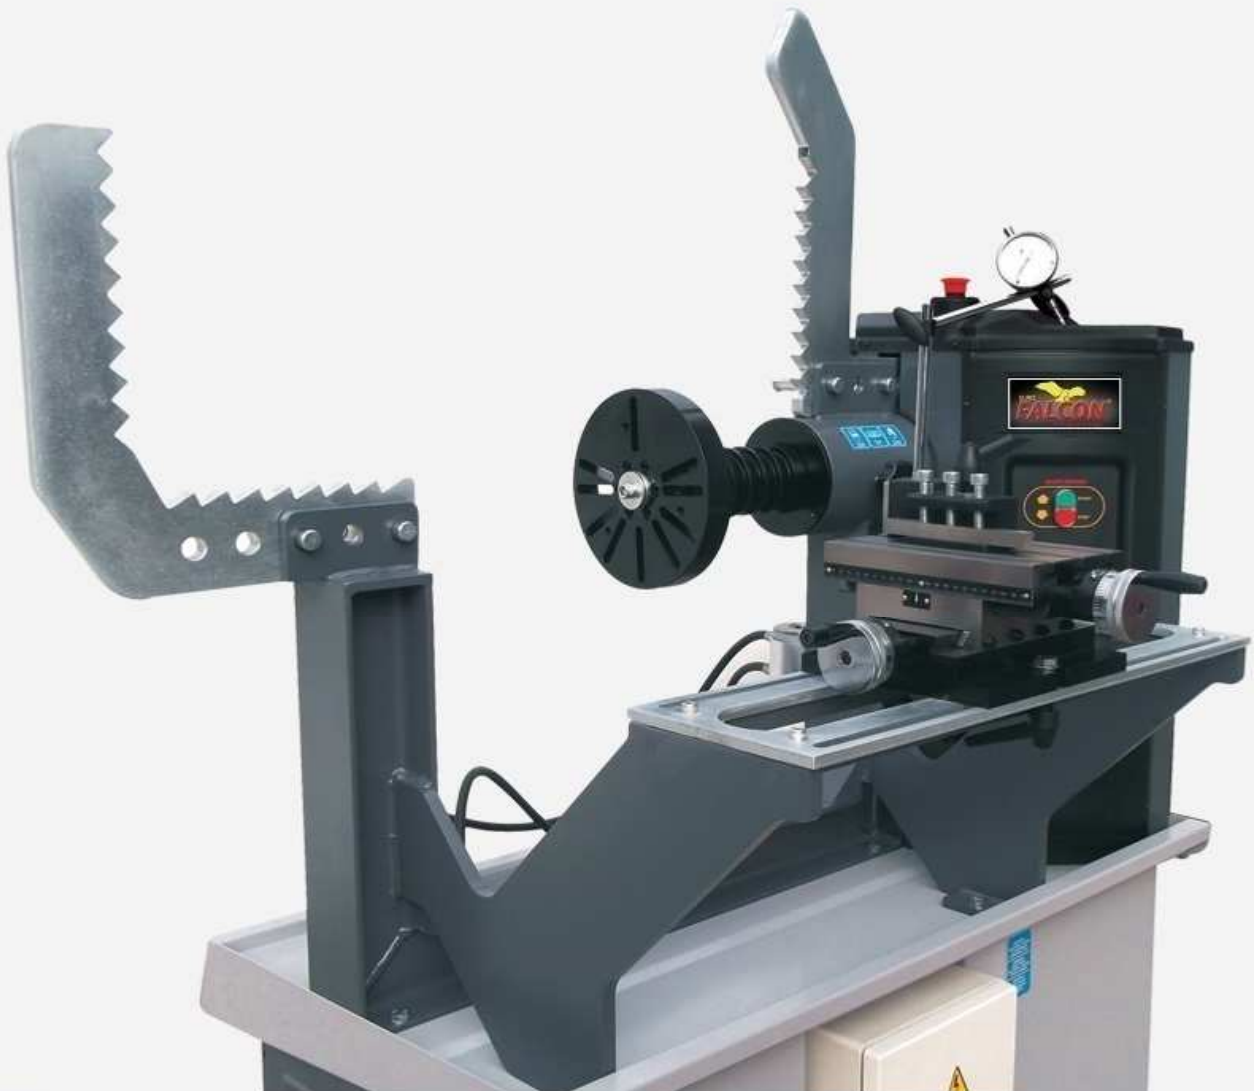

# PRO 28LS

## RIM STRAIGHTENING MACHINE



Bead straightening lever



Tools



### Standard Accesories

- 12 pcs rim centering rings
- 7 pcs straightening tips
- 3 pcs extended tip holders
- 2 pcs extended rings for tips
- 1 pcs lever
- 1 pcs rim insert tool
- 1 pcs upper support
- 1 pcs lower support
- 4 pcs support pins
- 5 pcs flange nuts and bolts
- 1 pcs gauge

### Optionals

- 220 V. Monophase
- Speed control unit

### Tecnical Data

- Rim Diameter: 10" - 28"
- Hydraulic Motor: 0,75 Hp 380V. 50 Hz. 3 Phase
- Axle Motor: 0,75 Hp 380V. 50 Hz. 3 Phase
- Working Pressure: 140 bar
- Sound Level: 60 dBA
- Rotation Speed: 250 rpm

### Dimensions

- Height: 1630 mm.
- Length: 1200 mm.
- Width : 900 mm.
- Packing Dimentions: 1200x800x1600H mm.

(Wooden palette in box)

### Weight

- Net: 360 kg.
- Gross: 380 kg. (Wooden palette in box)